

Dispex[®] Ultra PX 4290

Novel dispersing agent for organic and inorganic pigments for water-based coatings, printing inks and adhesives

Performance Highlights

- Suitable for organic and inorganic pigments
- Excellent viscosity reduction and stabilization
- Outstanding color strength and transparency
- Improved gloss
- Anti-flooding behavior
- Excellent flocculation stability

Sustainability Highlights

- Solvent-free
- APEO-free




Dispex® Ultra PX 4290

Broad spectrum dispersing agent for both organic and inorganic pigments

The Dispex® Ultra PX 4290 is a novel high molecular weight dispersing agent for organic and inorganic pigments in aqueous coating systems, printing inks and adhesives. It offers excellent pigment stabilizing characteristics, as well as outstanding color strength and viscosity reduction. This enables higher pigment loading and excellent maintenance of flow characteristics.

Viscosities of resin-free pigment concentrates before and after storage (2w 50°C)

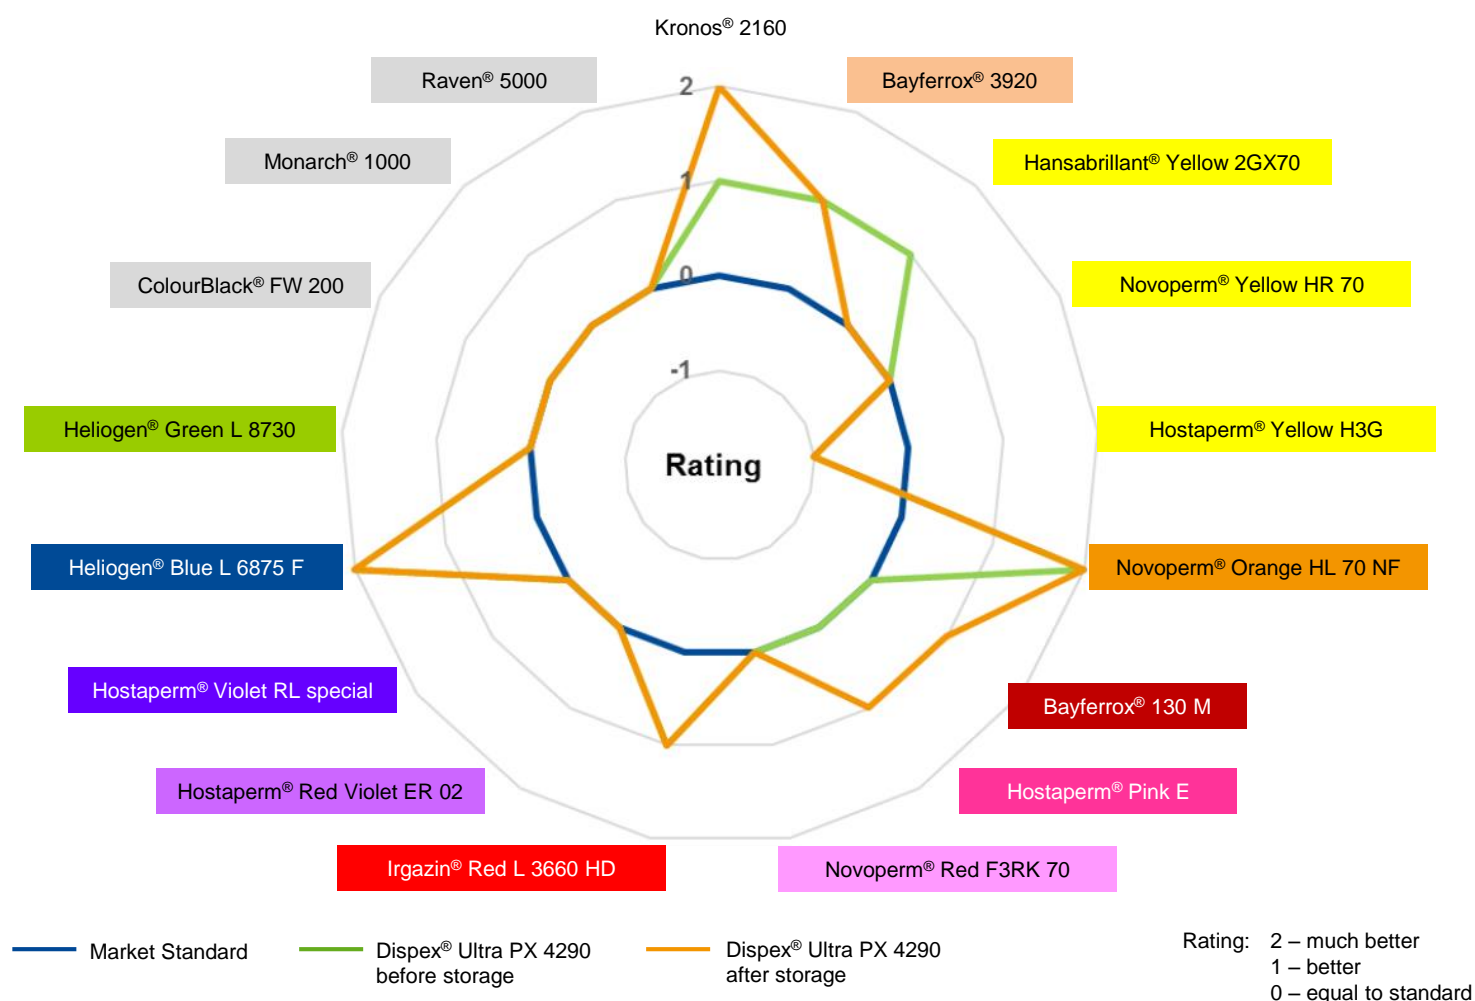

Dispex® Ultra PX 4290 offers excellent pigment stabilizing characteristics with organic and inorganic pigments

Contacts

Please contact our technical service department for more help on formulating with products from the Dispersing Agents product line.

Asia
BASF East Asia Regional HQ Ltd.
45/F., Jardine House
No.1 Connaught Place
Central
Hong Kong
formulation-additives-asia
@basf.com

Europe, Africa, West Asia
BASF SE
Formulation Additives
67056 Ludwigshafen
Germany
formulation-additives-europe
@basf.com

North America
BASF Corporation
11501 Steel Creek Road
Charlotte, NC 28273
USA
formulation-additives-nafta
@basf.com

South America
BASF S.A.
Rochaverá- Crystal Tower
Av. das Nações Unidas, 14.171
Morumbi - São Paulo-SP
Brazil
formulation-additives-south-america
@basf.com

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (01/2018)

© = Registered trademark of the BASF Group